

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/052682 A1

(51) International Patent Classification⁷: **G02F 1/355,**
G02B 6/134

University of Southampton, Highfield, Southampton SO17
1BJ (GB).

(21) International Application Number:
PCT/GB2004/004806

(74) Agent: MCGOWAN, Cathrine; D Young & Co, 120 Hol-
born, London EC1N 2DY (GB).

(22) International Filing Date:
16 November 2004 (16.11.2004)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).


(26) Publication Language: English

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: FABRICATION OF OPTICAL WAVEGUIDES IN PERIODICALLY POLED LITHIUM NIOBATE

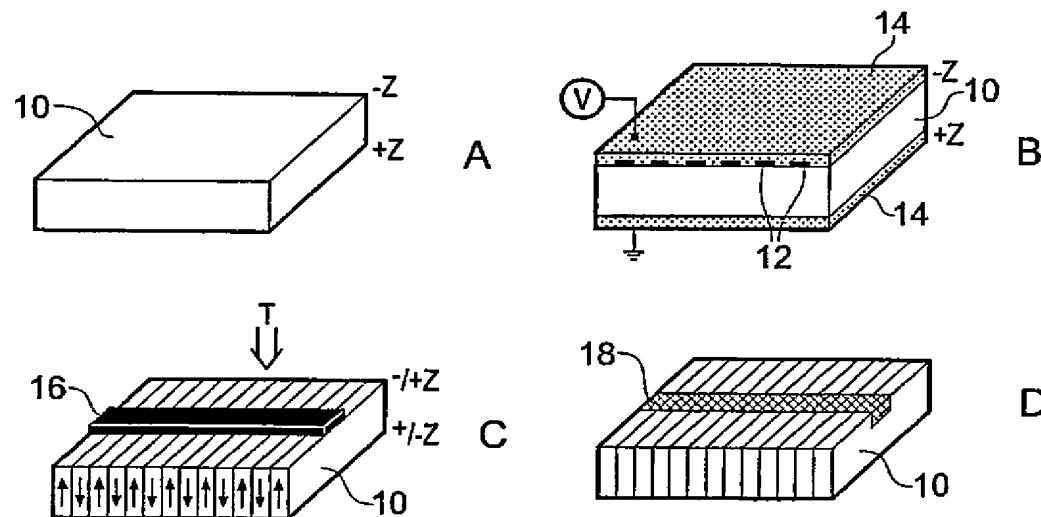

WO 2005/052682 A1

(57) Abstract: A method of fabricating an optical waveguide (18) comprises providing a sample of lithium niobate (10) that has one or more periodically poled gratings made by electric field poling, applying a patterned surface layer of metallic zinc (16) to a z-face of the sample so that the layer (16) has a pattern corresponding to an intended pattern of waveguides (18) to be written into the lithium niobate, and heating the sample to diffuse the metallic zinc (16) into the lithium niobate so as to form an optical waveguiding structure (18) within the sample.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.